

## 1.2.3 High Energy Pyroelectric Sensors

### 100µJ to 40J

#### Features

- Sensors with diffuser for high energies and high energy densities
- BF coating for highest damage threshold
- BB coating for spectral flatness
- Wide spectral range. Measure YAG and harmonics and many more.
- Rep rates up to 250Hz
- Measure lasers with pulse widths up to 20ms
- PE50BF-DIFH-C sensor - highest damage threshold

PE50BF-DIF-C / PE50BF-DIFH-C



PE50BB-DIF-C

DIFFUSER IN


DIFFUSER OUT




Model	PE50BF-DIF-C / PE50BF-DIFH-C					PE50BB-DIF-C					
Use	Complete calibration curve. Highest damage threshold					Removable diffuser. Spectrally flat					
Diffuser	Fixed					Diffuser out					Diffuser in
Aperture mm	Ø35					Ø46					Ø33
Absorber Type	BF with diffuser					BB					BB with diffuser
Spectral Range µm <sup>(a)</sup>	0.19 – 2.2, 2.94					0.19 – 20					0.4 – 2.5
Surface Reflectivity % approx.	25					5					15
Calibration Accuracy +/-% <sup>(a)</sup>	4					3					4
Max Pulse Width Setting <sup>(d)</sup>	1ms	2ms	5ms	10ms	20ms	3ms	10ms	20ms	3ms	10ms	20ms
Energy Scales	10J to 2mJ	10J to 2mJ	10J to 20mJ	10J to 20mJ	10J to 20mJ	10J to 2mJ	10J to 20mJ	10J to 20mJ	40J to 8mJ	40J to 8mJ	40J to 8mJ
Lowest Measurable Energy mJ <sup>(c)</sup>	0.2	0.4	0.8	0.8	0.8	0.1	0.1	0.2	0.5	5	5
Max Pulse Width ms	1	2	5	10	20	3	10	20	3	10	20
Maximum Pulse Rate pps	250Hz	100Hz	50Hz	40Hz	20Hz	40Hz	10Hz	5Hz	40Hz	10Hz	5Hz
Noise on Lowest Range µJ	40	80	200	200	200	15	15	20	40	60	80
Additional Error with Frequency %	±1%	±1%	±1%	±2%	±2%	±1%	±1%	±1%	±1%	±1%	±1%
Linearity with Energy for >7% of full scale <sup>(c)</sup>	±2%					±2%					
Damage Threshold J/cm <sup>2</sup> <sup>(b)</sup>	PE50BF-DIF-C		PE50BF-DIFH-C			Diffuser out			Diffuser in		
<100ns	4		6			0.3			3		
1µs	8		10			0.3			3		
300µs	30		30			1			10		
2ms	50		50			2			20		
Maximum Average Power W	25, 40 with optional heat sink					10, 15 with optional heat sink			30, 50 with optional heat sink		
Maximum Average Power Density W/cm <sup>2</sup>	200					10			500		
Uniformity over surface	±2.5% over central 20mm					±2% over 70% of diameter			±2.5% over central 20mm		
Weight kg	0.25					0.25					
Version											
<b>Part Number</b>	<b>7Z02940</b>		<b>7Z02943</b>			<b>7Z02947</b>					
Notes: (a) Calibration accuracy at various wavelengths as specified here.	Specified wavelengths: 248-266nm, 355nm, 532nm, 1064nm and 2100nm.					Calibrated at 1064nm					Calibrated at 1064nm, 532nm and 2100nm only
At other wavelengths, there may be an additional error up to the value given.	Max additional error at other wavelengths not specified above: ±2%. <240nm not calibrated					Max additional error at other wavelengths is ±2%					
Notes: (b)	For wavelengths >2.1µm, derate to 10% of above values. For wavelengths below 600nm, derate to 60% of given values (for DIFH 50% of given values). For wavelengths below 240nm, derate to 1J/cm <sup>2</sup> . For beam size <=5mm. For 10mm beam, derate DIF to 75% and DIFH to 30% of above.										
Notes: (c) With the "user threshold" setting set to minimum. For other settings, the spec is for >7% of full scale or greater than twice the "user threshold", whichever is greater. The user threshold is available with StarBright, StarLite, Nova II, Vega or Juno. For other meters, the threshold is set to minimum and the linearity spec is >10% of full scale. The PE-C series will only operate with Nova or Orion meters with an additional adapter Ophir P/N 7Z08272 (see page 85). The adapter can introduce up to 1% additional measurement error. The user threshold feature allows adjustment of the internal threshold up to 25% of full scale if desired to avoid false triggering in noisy environments. For further information, see the FAQs on our Website.											
Notes: (d) With the Laserstar, Pulsar, USBI, Quasar and Nova/Orion with adapter only 2 of the pulse width settings are available. For the PE-BF models the 1ms and 10ms settings and for the PE-BB model the 3ms and 10ms settings. Furthermore, with the diffuser mounted, the sensor may saturate at lower than the maximum energy in some cases. Therefore it is recommended to use these sensors with the newer meters/PC interfaces.											

\* For sensors drawings please see page 81


PE25-C / PE25BF-C

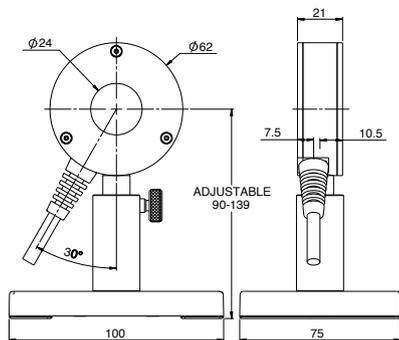


PE50-C / PE50BF-C

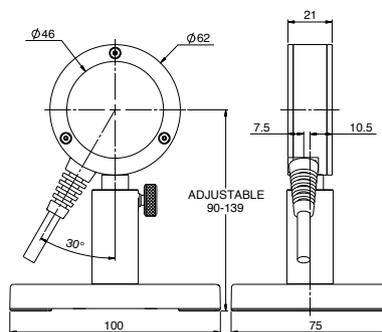


PE25BF-DIF-C

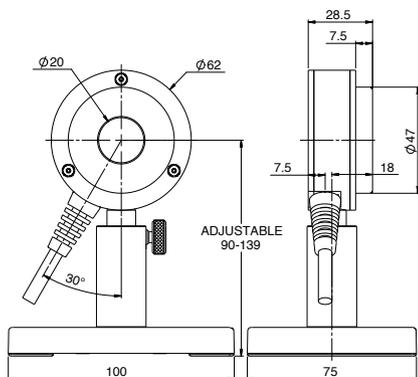

PE50BF-DIF-C / PE50-DIF-C

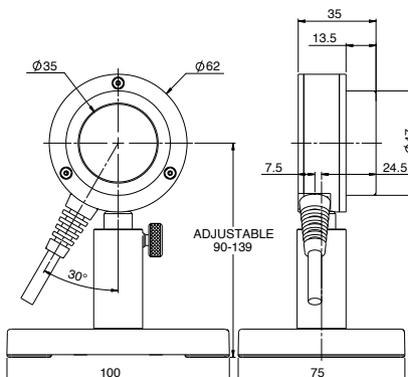

PE50BF-DIFH-C

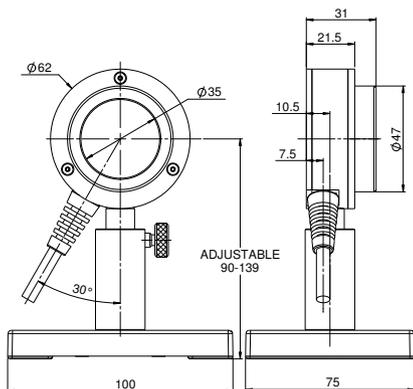

PE50BB-DIF-C

