


YLPN-1-1-100-M Pulsed Ytterbium Fiber Laser

NEW PRODUCT



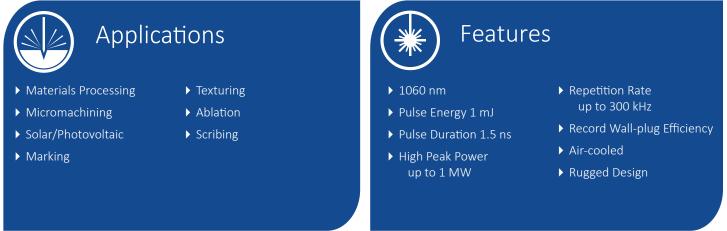

IPG Photonics' NEW YLPN Series of nanosecond fiber lasers provides high peak power with scalable average output power up to 100 W, short pulse duration <2 ns at full operational repetition rate range of 10-300 kHz. The all fiber format allows for the adjustment of pulse energy and/or pulse repetition rate without affecting the output beam parameters. IPG's novel fiber laser is much more efficient and compact than conventional lasers now on the market and is ideal for applications in the solar/photovoltaic arena, resistor trimming and marking of transparent materials. The ultrashort pulse duration and high peak power result in a very small heat affected zone.




YLPN-1-1-100-M Pulsed Ytterbium Fiber Laser

Optical Characteristics

Wavelength, nm	1060
Average Power, W	100
Pulse Energy, mJ	1
Pulse Duration, ns	1.3-2
Peak Power, MW	up to 1
Repetition Rate, kHz	10-300
Beam Quality, M ²	<2

General Characteristics

Module Dimensions, mm	270 x 220 x 86
Optical Head Dimensions (L x diam), mm	260 x 55 x 60
Cooling	Air-cooled
Supply Voltage, VDC	24
Power Consumption, W	430

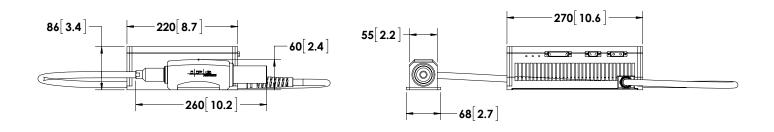

+1 (508) 373-1100

sales.us@ipgphotonics.com

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2014 IPG Photonics Corporation. All rights reserved.



08

The Power to Transform[®]