


Femtosecond Laser

PRELIMINARY

NEW!

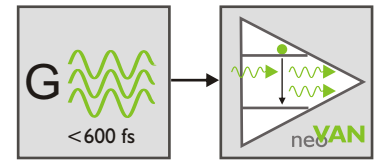

neoLASE MOPA Technology

neo**MOS**

Catch the peak!

The neoMOS femtosecond laser series combines the reliability and low maintenance of a state of the art femtosecond laser oscillator with a solid-state amplifier. The new developed laser system further expands the neoMOS pulse duration range into the area of less than 600 fs. The CPA free technology allows for bandwidth limited pulses on a smallest available footprint.

Cold Laser Processing

The new neoMOS system with pulse durations of less than 600 fs enables new and more efficient laser material processing's. Whether micro material or nonlinear processing the short pulse duration supports cold and therefore highly precise laser material applications.

neoMOS femtosecond Laser

Key features

Output power	> 10 W
Pulse duration	< 600 fs
Pulse energy	> 40 μ J
Repetition rates	single shot to MHz
Beam quality	TEM _{0,0} / M ² < 1.3



Advantages

- Compact laser head design
- CPA free technologie


neoMOS 600fs

Seed Laser	Modelocked Fiber Oscillator
Pulse duration	< 600 fs
Average power	> 10 W
Repetition rate	Single shot to MHz
Max. pulse energy	>40 μ J @ 1030 nm
Beam quality	TEM _{0,0} M ² <1.3 / >85 % circularity
Power noise	< 1 % RMS
Polarization ratio	> 100:1
Warm-up time	<30 min.
Laser controller	19" Rackmount 4 U height
Cooling	Water cooled
Options	SHG

Typical Output Power and Pulse Energy

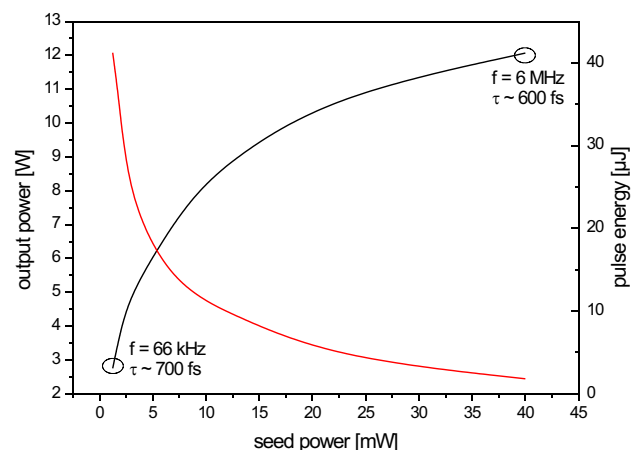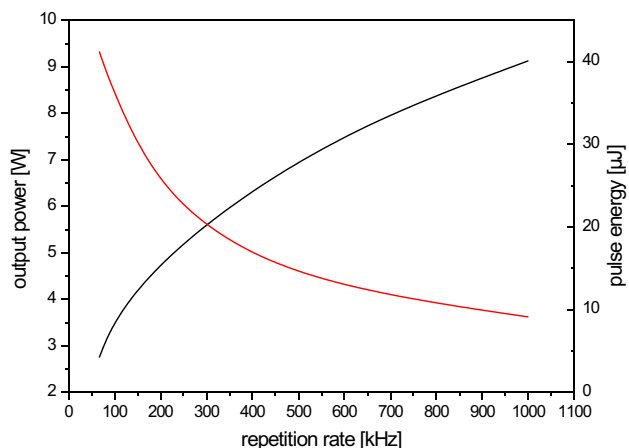

Dimensions

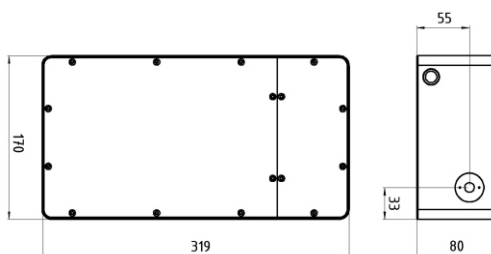

Output performance and specifications can be adapted with different seed laser systems. Housing specifications are depending on the level of integration. OEM amplifier configurations available.

Visit www.neolase.com or email info@neolase.com for further information.

- Notes:
1. Due to neoLASE continuous product improvement, all specifications are subject to change without notice.
 2. Laser light emitted from this system is invisible and will be harmful to the human eye. Proper laser safety eyewear must be worn during operation.

