


BRaMMS-Solo - 1064/XXXX

- from 50mW to 3W output power at 1064nm SLM
- feedback locked Single Longitudinal Mode CW operation
- mode hops and lock loss free
- very low noise performance, < 0.1% rms
- excellent beam quality from smallest footprint
- lowest power consumption for given output

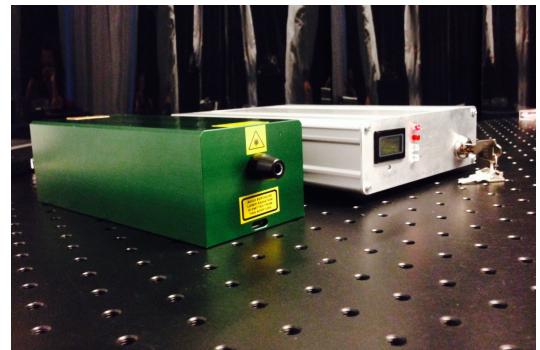

BRaMMS – Solo - 1064/3000

	<i>Units</i>	<i>Low Power Version</i>	<i>High Power Version</i>
<i>Output Beam Parameters:</i>			
Output Power (CW)	mW	50 - 200	500 - 3000
Wavelength	nm		1064
Output Beam Diameter, TEM ₀₀	mm	0.8	1.0
Beam Divergence	mrad		< 1, diffraction limited
Beam Pointing Stability	µrad/°C		≤ 5
Longitudinal Mode Structure			SLM
Line Width	MHz		< 0.5
Line Spectral Position Stability	MHz (pm)	+/- 50 (+/-0.2) within 4 hrs of CW operation	
Coherence Length	m		> 100
Mode Hops Free Fine Tuning Range	GHz		25 – 30 (optional)
Polarisation			Linear, Vertical; ≥100:1
Output Power Noise	%		≤ 0.1rms, ≤ 1p-p (10Hz – 10MHz)
Output Power Stability	%		≤2, within any 4 hours of CW operation

Environmental:

Working Temperatures	°C	15 – 35, conductive cooling via mounting interface
Storage Temperatures	°C	-20 to 75
Humidity	%	5 -95, non-condensing
Warm up time	min	<10

Dimensions and Electrical:


Operating Voltage	VAC	90 to 240
Frequency	Hz	50-60
Power Consumption	W	<20

*Fixed output power turnkey system, CW operation, factory aligned and sealed.
Specification may be subject to change without notice.*


sales@uniklasers.com
www.uniklasers.com

BRaMMS-Solo - 1064/XXXX Laser Head and Controller Dimensional Specification

Low Power Version - 50-200mW: Laser Head 50x 50x 120mm; Controller 170x 53.5x 163mm

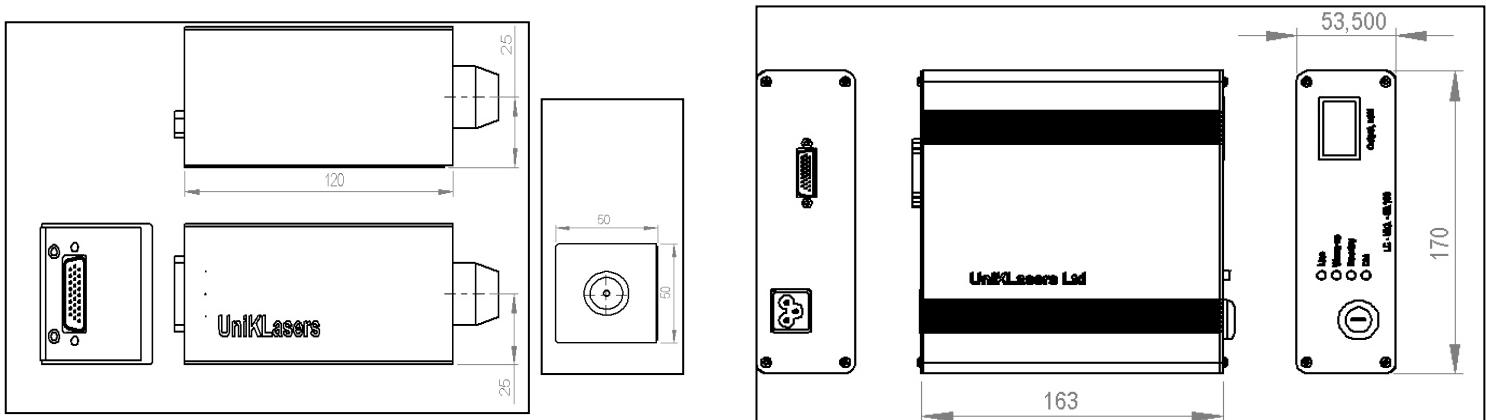

High Power Version - 500-3000mW: Laser Head 80x 75x 198mm; Controller 170x 53.5x 223mm

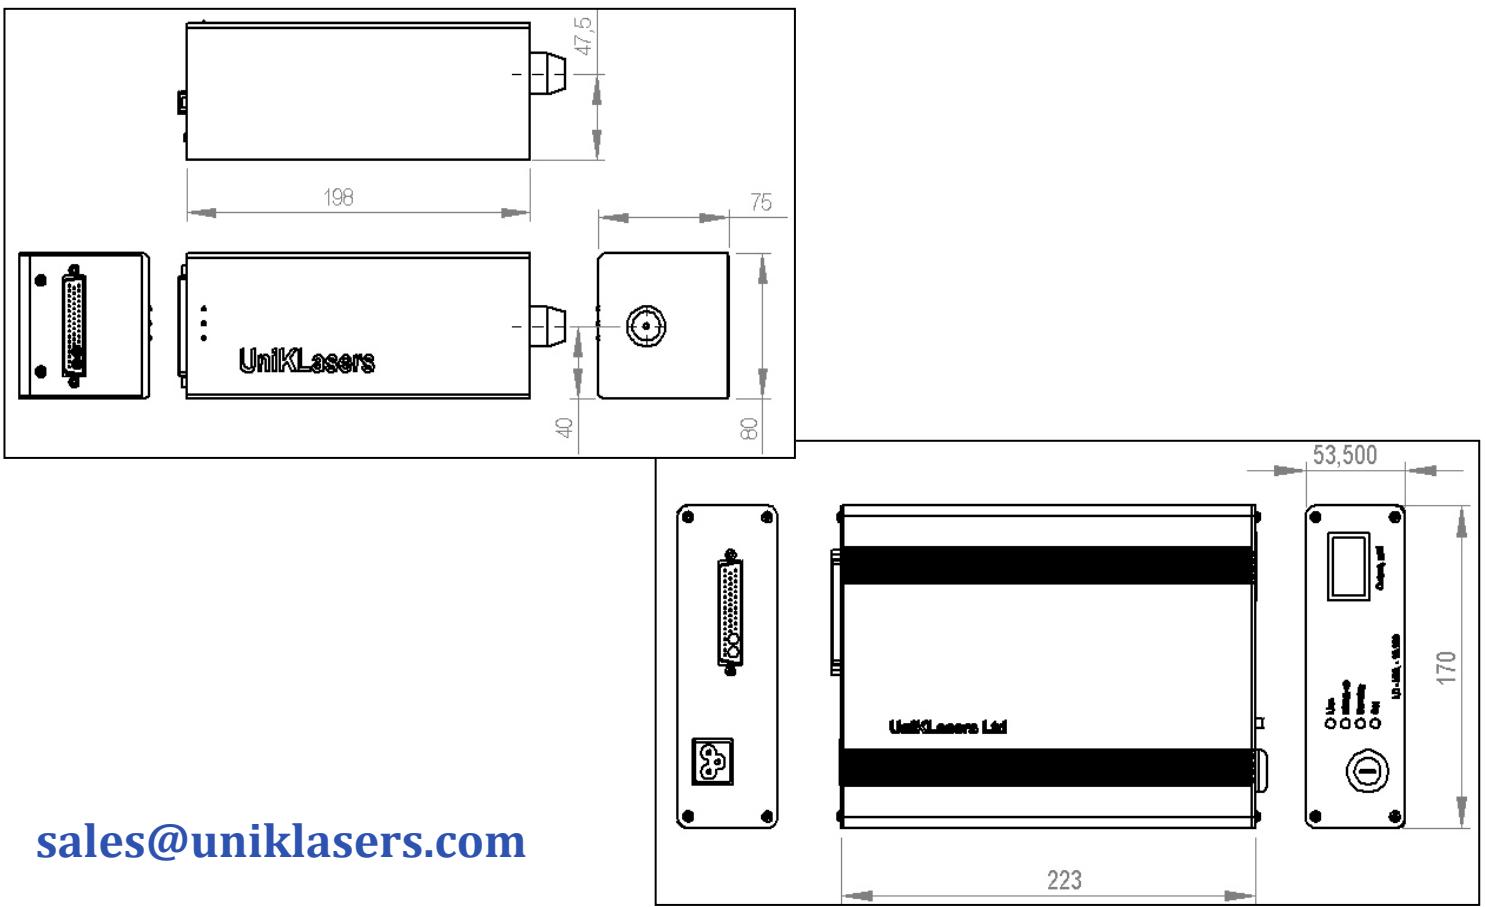

sales@uniklasers.com

www.uniklasers.com