

Nano-3D200

Features

- ▶ Compact size
- ▶ Low cost
- ▶ 200 μm three axis motion (XYZ)
- ▶ Closed loop control
- ▶ True flexure guided motion


Typical Applications

- ▶ Optical fiber alignment
- ▶ Hybrid positioning systems
- ▶ Nanofabrication

LabVIEW Compatible USB Interfaces



Examples, tutorial, and
Nano-Route[®] 3D supplied
with Nano-Drive[®] USB
interfaces.

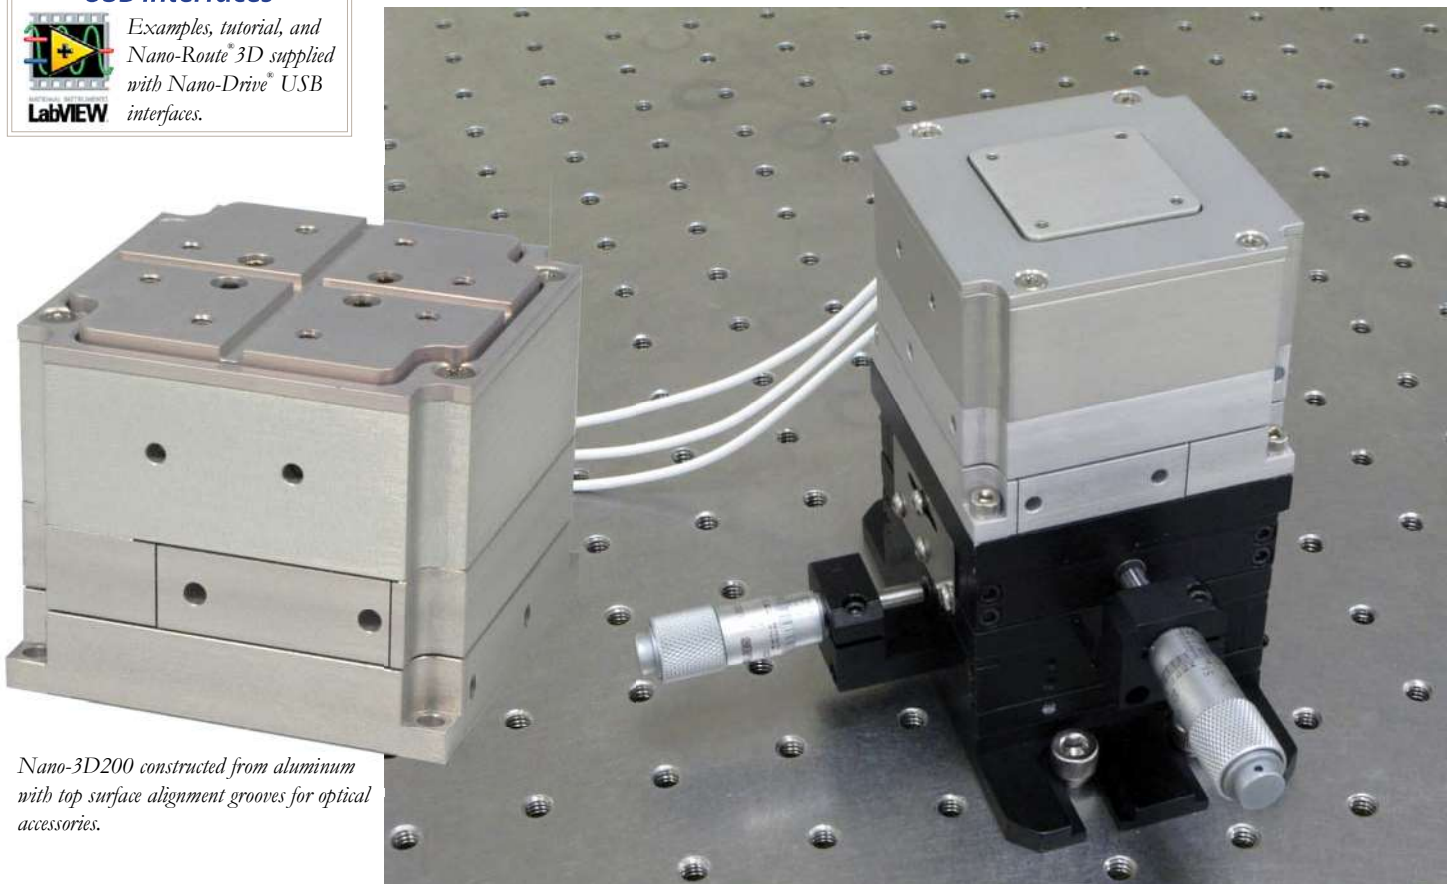

Nano-3D200 constructed from aluminum with top surface alignment grooves for optical accessories.

Nano-3D200 combined with a coarse XY positioner is ideal for optical alignment applications.

Product Description





The Nano-3D200 is a compact three axis (XYZ) nanostaging system constructed from aluminum. The compact design of the Nano-3D200 allows it to be easily integrated with coarse positioning stages and standard optical fixturing accessories. Internal position sensors combine with the closed loop controller to provide absolute, repeatable position measurement and long

term stability. Independent flexure guided motion for each axis provides mechanical isolation and ensures that alignment adjustments can be done with minimum cross-talk between axes. A wireless 3-axis joystick controller is available as a convenience for fast, precise manual alignment without computer programming.

Technical Specifications

Ranges of motion (XYZ)	200 μ m
Resolution	1 nm
Resonant Frequency (X)	150 Hz \pm 20%
Resonant Frequency (Y)	150 Hz \pm 20%
Resonant Frequency (Z)	500 Hz \pm 20%
Stiffness	1.0 N/ μ m
Recommended max. load (horizontal)*	0.5 kg
Recommended max. load (vertical)*	0.2 kg
Body Material	Aluminum
Controller	Nano-Drive [®]

* Larger load requirements should be discussed with our engineering staff.

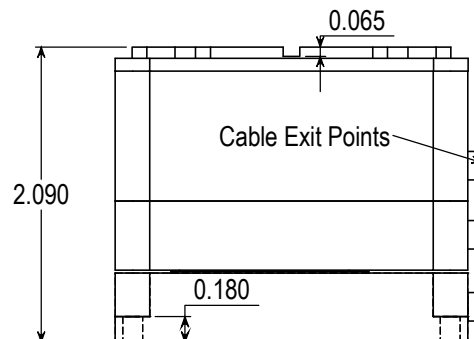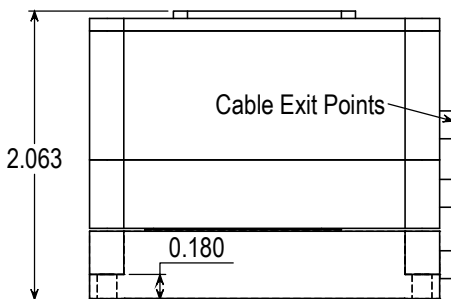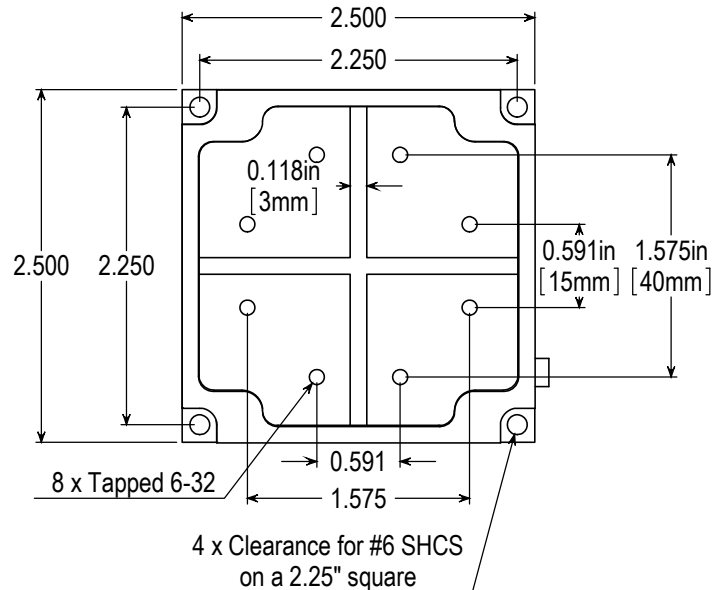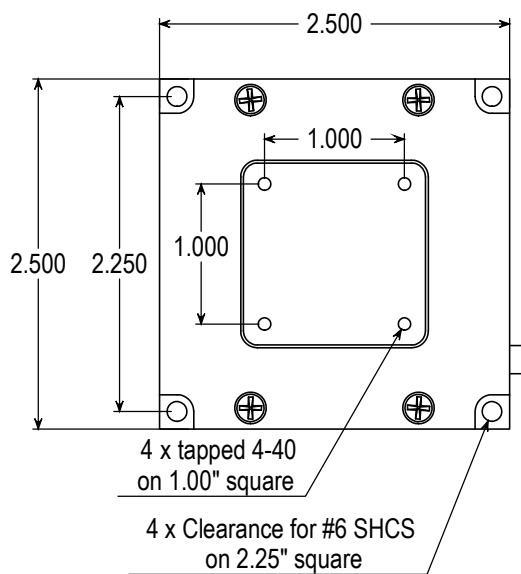

Note: All Dimensions in Inches