

Sapphire FP

Fiber Pigtailed Lasers from Deep Blue to Orange

The Coherent Sapphire FP is a series of true fiber-pigtailed lasers based on Coherent's unique Optically Pumped Semiconductor Laser (OPSL) technology. OPSL technology delivers established legacy wavelengths of ion and diode-pumped solid-state lasers, and its scalability allows for customized wavelengths to be developed and tailored to a specific application.

The Sapphire FP lasers are manufactured in clean rooms using Coherent's patented PermAlign™ technology to deliver optimal aligning and solder bonding of the optics. The fiber is an integral part of the resonator and is completely independent of the outer housing.

Coherent's proprietary fiber design allows operation at short wave-lengths and/or high powers without fiber degradation or damage. As a result, Sapphire FP lasers deliver excellent output stability, lowest noise and superior polarization (PER) over a broad ambient temperature operating range (10°C to 40°C).

The Sapphire FP lasers are provisioned with flexible interfaces including Analog, RS-232, and USB, offering a choice of communication channels for every customer's specific requirement.

The Sapphire FP lasers find wide application in life sciences, metrology, and inspection where fluorescence-based techniques leverage fiber delivery to facilitate miniaturization.



Superior Reliability & Performance

Sapphire FP Features:

- **All Sapphire advantages with fiber delivery**
- **Single mode, polarization maintaining fiber**
- **Extended life fiber design**

Sapphire FP Applications:

- **Confocal Microscopy**
- **Flow Cytometry**
- **Genomics & Proteomics**
- **High Throughput Drug Screening**
- **Medical Diagnostics**
- **Semiconductor Inspection**

Sapphire FP

Fiber Pigtailed Lasers from Deep Blue to Orange

System Specifications	Sapphire 458 FP	Sapphire 488 FP
Wavelength ¹ (nm)	458 ±2	488 ±2
Output Power at Fiber Exit ² (mW)	40	40, 80, 120, 200
Fiber Type	SM-PM ³	
Fiber Length (m)	1	
Fiber Output	FC/APC; 8° angled ⁴	
Spatial Mode	TEM ₀₀ , M ² <1.1	
Beam Asymmetry	<1:1.1	
Noise (%)		
RMS (20 Hz to 2 MHz)	<0.25	
Peak-to-Peak Noise (20 Hz to 20 kHz)	<1	
Long-term Power Stability (%) (2 hours, ±3°C)	<2	
Warm-up Time (min.)	<5	
Polarization Ratio	>100:1, linear, vertical	
Utility and Environmental Requirements		
Laser Safety Classification	3b	
Operating Voltage ⁵ (VDC)	+10.8 to 15	
Power Consumption (W)	<60	
Max. Laser Head Baseplate Temperature ⁶	50°C/122°F	
Max. Heat Dissipation of Laser Head (W)	25 (baseplate at 50°C/122°F)	
Ambient Temperature		
Operating Condition	10 to 40°C/50 to 104°F	
Non-Operating Condition	-20 to 60°C/-4 to 140°F	
Humidity		
Operating Condition	0 to 95%, non-condensing	
Non-Operating Condition	0 to 100%, non-condensing	
Shock Tolerance (11 ms)	15g laterally, 15g vertically	
Dimensions (L x W x H)		
Laser Head ⁷	125 x 70 x 34 mm/4.9 x 2.8 x 1.3 in.	
Controller	118 x 76 x 30 mm/4.6 x 3.0 x 1.2 in.	
Heat Sink (optional)	200 x 80 x 50 mm/7.9 x 3.2 x 2.0 in.	
DC Power Supply (optional)	171 x 104 x 55 mm/6.7 x 4.1 x 2.2 in.	
Cable Laser Head to Controller	2m/6.56 ft. and options	
Weights		
Laser Head ⁷	0.35 kg/0.77 lbs.	
Controller	0.25 kg/0.55 lbs.	
Heat Sink (optional)	0.75 kg/1.65 lbs.	
DC Power Supply (optional)	0.95 kg/2.1 lbs. incl. line cable	
Cable Laser Head to Controller	0.3 kg/0.66 lbs.	

¹ Laser-to-laser tolerance.

² Output power is adjustable via analog or digital interface from 10% to 110%. Specifications are valid for 100% power.

³ Single-mode, polarization maintaining fiber, bending radius min. 50 mm.

⁴ Fiber FC/APC connector output not compatible for patchcord-to-patchcord connection.

⁵ If user-supplied, the DC power supply has to meet the following requirements: power >60W; ripple <5% peak-to-peak; line regulation <0.5%.

⁶ With factory-provided or other adequate heat sink.

⁷ Dimensions respectively weight without fiber-pigtail part.

Sapphire FP

Fiber Pigtailed Lasers from Deep Blue to Orange

System Specifications	Sapphire 514 FP	Sapphire 532 FP	Sapphire 552 FP
Wavelength ¹ (nm)	514 ±2	532 ±2	552 ±2
Output Power at Fiber Exit ² (mW)	40, 80, 120	40, 80, 120	40, 80, 120
Fiber Type		SM-PM ³	
Fiber Length (m)		1	
Fiber Output		FC/APC; 8° angled ⁴	
Spatial Mode		TEM ₀₀ , M ² <1.1	
Beam Asymmetry		<1:1.1	
Noise (%)			
RMS (20 Hz to 2 MHz)		<0.25	
Peak-to-Peak Noise (20 Hz to 20 kHz)		<1	
Long-term Power Stability (%) (2 hours, ±3°C)		<2	
Warm-up Time (min.)		<5	
Polarization Ratio		>100:1, linear, vertical	
Utility and Environmental Requirements			
Laser Safety Classification		3b	
Operating Voltage ⁵ (VDC)		+10.8 to 15	
Power Consumption (W)		<60	
Max. Laser Head Baseplate Temperature ⁶		50°C/122°F	
Max. Heat Dissipation of Laser Head (W)		25 (baseplate at 50°C/122°F)	
Ambient Temperature			
Operating Condition		10 to 40°C/50 to 104°F	
Non-Operating Condition		-20 to 60°C/-4 to 140°F	
Humidity			
Operating Condition		0 to 95%, non-condensing	
Non-Operating Condition		0 to 100%, non-condensing	
Shock Tolerance (11 ms)		15g laterally, 15g vertically	
Dimensions (L x W x H)			
Laser Head ⁷		125 x 70 x 34 mm/4.9 x 2.8 x 1.3 in.	
Controller		118 x 76 x 30 mm/4.6 x 3.0 x 1.2 in.	
Heat Sink (optional)		200 x 80 x 50 mm/7.9 x 3.2 x 2.0 in.	
DC Power Supply (optional)		171 x 104 x 55 mm/6.7 x 4.1 x 2.2 in.	
Cable Laser Head to Controller		2m/6.56 ft. and options	
Weights			
Laser Head ⁷		0.35 kg/0.77 lbs.	
Controller		0.25 kg/0.55 lbs.	
Heat Sink (optional)		0.75 kg/1.65 lbs.	
DC Power Supply (optional)		0.95 kg/2.1 lbs. incl. line cable	
Cable Laser Head to Controller		0.3 kg/0.66 lbs.	

¹ Laser-to-laser tolerance.

² Output power is adjustable via analog or digital interface from 10% to 110%. Specifications are valid for 100% power.

³ Single-mode, polarization maintaining fiber, bending radius min. 50 mm.

⁴ Fiber FC/APC connector output not compatible for patchcord-to-patchcord connection.

⁵ If user-supplied, the DC power supply has to meet the following requirements: power >60W; ripple <5% peak-to-peak; line regulation <0.5%.

⁶ With factory-provided or other adequate heat sink.

⁷ Dimensions respectively weight without fiber-pigtail part.

Sapphire FP

Fiber Pigtailed Lasers from Deep Blue to Orange

System Specifications	Sapphire 561 FP	Sapphire 588 FP	Sapphire 594 FP
Wavelength ¹ (nm)	561 ±2	588 ±2	594 ±2
Output Power at Fiber Exit ² (mW)	40, 80, 120, 200	40	40
Fiber Type		SM-PM ³	
Fiber Length (m)		1	
Fiber Output		FC/APC; 8° angled ⁴	
Spatial Mode		TEM ₀₀ , M ² <1.1	
Beam Asymmetry		<1:1.1	
Noise (%)			
RMS (20 Hz to 2 MHz)		<0.25	
Peak-to-Peak Noise (20 Hz to 20 kHz)		<1	
Long-term Power Stability (%) (2 hours, ±3°C)		<2	
Warm-up Time (min.)		<5	
Polarization Ratio		>100:1, linear, vertical	
Utility and Environmental Requirements			
Laser Safety Classification		3b	
Operating Voltage ⁵ (VDC)		+10.8 to 15	
Power Consumption (W)		<60	
Max. Laser Head Baseplate Temperature ⁶		50°C/122°F	
Max. Heat Dissipation of Laser Head (W)		25 (baseplate at 50°C/122°F)	
Ambient Temperature			
Operating Condition		10 to 40°C/50 to 104°F	
Non-Operating Condition		-20 to 60°C/-4 to 140°F	
Humidity			
Operating Condition		0 to 95%, non-condensing	
Non-Operating Condition		0 to 100%, non-condensing	
Shock Tolerance (11 ms)		15g laterally, 15g vertically	
Dimensions (L x W x H)			
Laser Head ⁷		125 x 70 x 34 mm/4.9 x 2.8 x 1.3 in.	
Controller		118 x 76 x 30 mm/4.6 x 3.0 x 1.2 in.	
Heat Sink (optional)		200 x 80 x 50 mm/7.9 x 3.2 x 2.0 in.	
DC Power Supply (optional)		171 x 104 x 55 mm/6.7 x 4.1 x 2.2 in.	
Cable Laser Head to Controller		2m/6.56 ft. and options	
Weights			
Laser Head ⁷		0.35 kg/0.77 lbs.	
Controller		0.25 kg/0.55 lbs.	
Heat Sink (optional)		0.75 kg/1.65 lbs.	
DC Power Supply (optional)		0.95 kg/2.1 lbs. incl. line cable	
Cable Laser Head to Controller		0.3 kg/0.66 lbs.	

¹ Laser-to-laser tolerance.

² Output power is adjustable via analog or digital interface from 10% to 110%. Specifications are valid for 100% power.

³ Single-mode, polarization maintaining fiber, bending radius min. 50 mm.

⁴ Fiber FC/APC connector output not compatible for patchcord-to-patchcord connection.

⁵ If user-supplied, the DC power supply has to meet the following requirements: power >60W; ripple <5% peak-to-peak; line regulation <0.5%.

⁶ With factory-provided or other adequate heat sink.


⁷ Dimensions respectively weight without fiber-pigtail part.

Sapphire FP


Fiber Pigtailed Lasers from Deep Blue to Orange

Mechanical Specifications

Laser Head

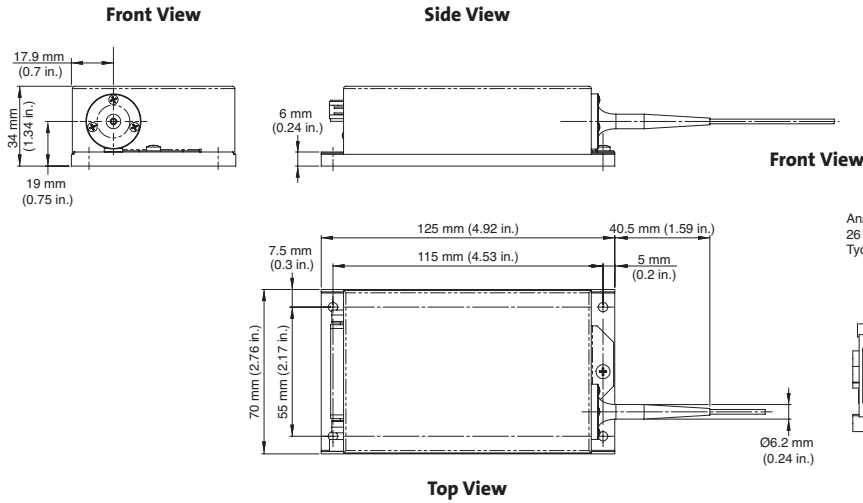

Controller

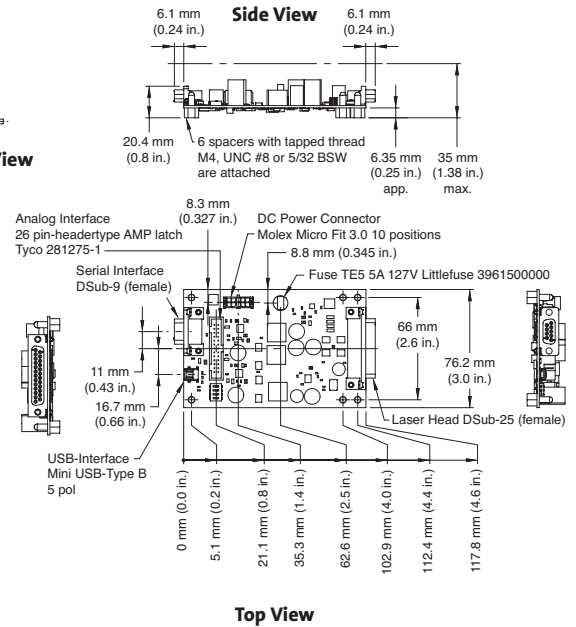

COHERENT

www.Coherent.com

Coherent, Inc.,
 5100 Patrick Henry Drive
 Santa Clara, CA 95054
 phone (800) 527-3786
 (408) 764-4983
 fax (408) 764-4646
 e-mail tech.sales@Coherent.com

Benelux +31 (30) 280 6060
 China +86 (10) 8215 3600
 France +33 (0)1 8038 1000
 Germany/Austria/
 Switzerland +49 (6071) 968 333
 Italy +39 (02) 31 03 951
 Japan +81 (3) 5635 8700
 Korea +82 (2) 460 7900
 Taiwan +886 (3) 505 2900
 UK/Ireland +44 (1353) 658 833

Printed in the U.S.A. MC-027-12-0M1115Rev.C
 Copyright ©2015 Coherent, Inc.

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all Sapphire lasers. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.

